


# 6" ROUND TAPERED ALUMINUM POLE

NPT60 SERIES FREE STANDING 6"Ø ALUMINUM POLES  
 MAXIMUM HEIGHT 30 FT.  
 3" X 5" HAND HOLE C/W GROUND LUG  
 FINISH: ROTARY POLISH OR POWDERCOATED

**ORDERING EXAMPLE:** NPT6030C22AB  
 NPT-ROUND TAPERED SERIES  
 60-DIAMETER AT BASE IS 6 INCHES  
 30-DIAMETER AT TOP IS 3 INCHES  
 C - WALL THICKNESS IS .188  
 22 - POLE IS 22 FEET HIGH  
 AB-CAST ALUMINUM BASE (DB - DIRECT BURIAL)





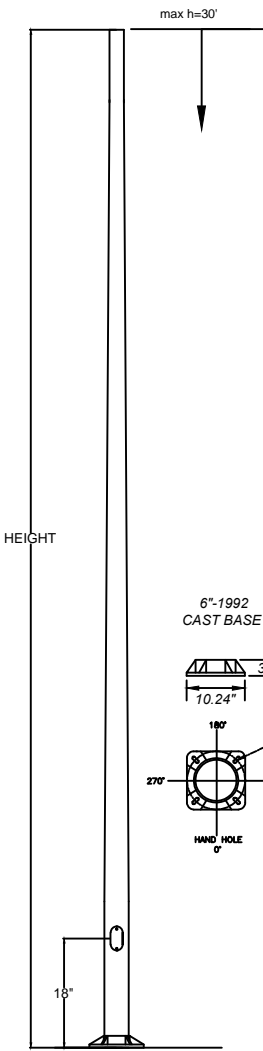


NPT 60 SERIES POLES										
EPA (MPH) recommend to not exceed										
MODEL	WALL	30' @ POLE TOP				150				STANDARD POLE SUPPLIED WITH-
		LENGTH	UTT DIA	OP	DIAM	100	110	130	150	
NPT6030D30AB	0.25	30'	6"	3"	5	3.5	2	1	1	: GROUND BAR & LUG : NUT COVERS
NPT6030C30AB	0.188	30'	6"	3"	3	2	1	N/A	: POWDERCOAT : ANCHOR BOLTS : 2 PC CAST BASE COVERS : TENONS OR FIXTURE DRILLINGS : TOP CAP : ELECTRICAL OUTLETS : BANNER ARMS : BREAKAWAY TRANSFORMER BASES : BREAKAWAY CONNECTORS : CUSTOM COLORS : TAMPER RESISTANT HDWRE : VIBRATION DAMPERS (IF REQUIRED)	
NPT6030B30AB	0.156	30'	6"	3"	1.5	1	N/A	N/A		
25' @ POLE TOP										
MODEL	WALL	25' @ POLE TOP				150				STANDARD POLE SUPPLIED WITH-
		LENGTH	UTT DIA	OP	DIAM	100	110	130	150	
NPT6030D25AB	0.25	25'	6"	3"	8	6.5	4	2.5	2.5	: POWDERCOAT : ANCHOR BOLTS : 2 PC CAST BASE COVERS : TENONS OR FIXTURE DRILLINGS : TOP CAP : ELECTRICAL OUTLETS : BANNER ARMS : BREAKAWAY TRANSFORMER BASES : BREAKAWAY CONNECTORS : CUSTOM COLORS : TAMPER RESISTANT HDWRE : VIBRATION DAMPERS (IF REQUIRED)
NPT6030C25AB	0.188	25'	6"	3"	5.5	4	2.5	1.5	1.5	
NPT6030B25AB	0.156	25'	6"	3"	4	3	1.5	1	1	
20' @ POLE TOP										
MODEL	WALL	20' @ POLE TOP				150				STANDARD POLE SUPPLIED WITH-
		LENGTH	UTT DIA	OP	DIAM	100	110	130	150	
NPT6030D20AB	0.25	20'	6"	3"	12	9	6.5	4.5	4.5	: POWDERCOAT : ANCHOR BOLTS : 2 PC CAST BASE COVERS : TENONS OR FIXTURE DRILLINGS : TOP CAP : ELECTRICAL OUTLETS : BANNER ARMS : BREAKAWAY TRANSFORMER BASES : BREAKAWAY CONNECTORS : CUSTOM COLORS : TAMPER RESISTANT HDWRE : VIBRATION DAMPERS (IF REQUIRED)
NPT6030C20AB	0.188	20'	6"	3"	8.5	6.5	4.5	3	3	
NPT6030B20AB	0.156	20'	6"	3"	6.5	5	3.5	2	2	
15' @ POLE TOP										
MODEL	WALL	15' @ POLE TOP				150				STANDARD POLE SUPPLIED WITH-
		LENGTH	UTT DIA	OP	DIAM	100	110	130	150	
NPT6030D15AB	0.25	15'	6"	3"	17.5	14.5	10	7	7	: POWDERCOAT : ANCHOR BOLTS : 2 PC CAST BASE COVERS : TENONS OR FIXTURE DRILLINGS : TOP CAP : ELECTRICAL OUTLETS : BANNER ARMS : BREAKAWAY TRANSFORMER BASES : BREAKAWAY CONNECTORS : CUSTOM COLORS : TAMPER RESISTANT HDWRE : VIBRATION DAMPERS (IF REQUIRED)
NPT6030C15AB	0.188	15'	6"	3"	13	10.5	7	5	5	
NPT6030B15AB	0.156	15'	6"	3"	10.5	8.5	6	4	4	

THE ABOVE POLES ARE ONLY EXAMPLES OF OUR AVAILABLE LINE OF POLES. PLEASE CALL OUR ORDER DESK TO INQUIRE ABOUT YOUR REQUIREMENTS



## 2 PC. CAST BASE COVERS

SELECTIONS VARY BY SIZE. PLEASE CONTACT OUR SALES DESK TO INQUIRE ABOUT OTHER AVAILABLE OPTIONS & STYLES




## STRUCTURAL BASE COVERS

SELECTIONS VARY BY SIZE. PLEASE CONTACT OUR SALES DESK TO INQUIRE ABOUT OTHER AVAILABLE OPTIONS & STYLES



ANCHOR BOLTS PROJECTION


## ANCHOR BOLTS




POLES ARE FABRICATED FROM 6063-T4 SEAMLESS ALUMINUM AND HEAT TREATED TO T6 AFTER WELDING...

WELDING CSA CERTIFIED TO CWB 47.1, 47.2

## DIRECT BURIALS



BELOW GRADE SECTION OVALIZED, POWDERCOATED, AND RUBBER PIPE WRAPPED



NOVA POLE Industries Inc.  
 64 MA-TE-WAY PARK DRIVE  
 Renfrew, On. Canada  
 K7V 2L5

Tel: 613-431-7653  
 Fax: 613-431-7655  
 www.novapole.com

THIS DRAWING IS THE PROPERTY OF NOVA POLE INDUSTRIES INC. AND CONTAINS CONFIDENTIAL INFORMATION. REPRODUCTION OF ANY INFORMATION FROM IT WITHOUT EXPRESS WRITTEN PERMISSION OF NOVA POLE INDUSTRIES INC. IS NOT PERMITTED.