


# 10" ROUND TAPERED ALUMINUM POLE

NPT10 SERIES FREE STANDING 10"Ø ALUMINUM POLES  
 MAXIMUM HEIGHT 45 FT.  
 4" X 8" HAND HOLE C/W GROUND LUG  
 FINISH: ROTARY POLISH OR POWDERCOATED

**ORDERING EXAMPLE:** NPT1050C25AB  
 NPT-ROUND TAPERED SERIES  
 10-DIAMETER AT BASE IS 10 INCHES  
 50-DIAMETER AT TOP IS 5 INCHES  
 C - WALL THICKNESS IS .188  
 25 - POLE IS 25 FEET HIGH  
 AB-CAST ALUMINUM BASE (DB - DIRECT BURIAL)

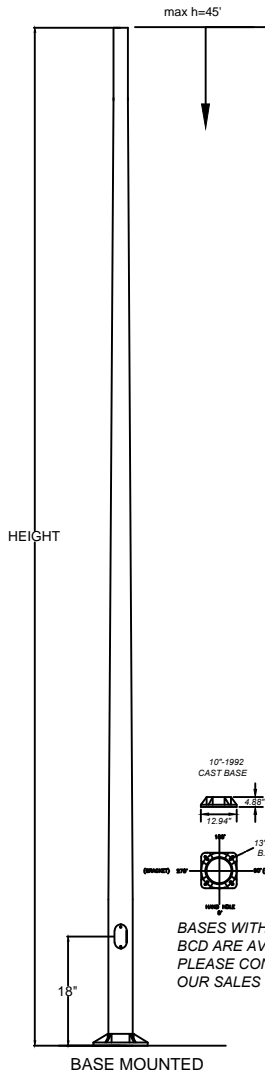

**NPT 10 SERIES POLES**


EPA (MPH) recommend to not exceed

				100	110	130	150
<b>45' @ POLE TOP</b>							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	45'	10"	10" - 5"	11	9	4.5	2
0.188	45'	10"	10" - 5"	7	5.5	2.5	N/A
0.156	45'	10"	10" - 5"	5	3.5	1	N/A
<b>40' @ POLE TOP</b>							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	40'	10"	10" - 5"	14	11	6.5	3.5
0.188	40'	10"	10" - 5"	9.5	7	4	1.5
0.156	40'	10"	10" - 5"	7	5	2.5	N/A
<b>35' @ POLE TOP</b>							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	35'	10"	10" - 5"	17.5	14	9	5.5
0.188	35'	10"	10" - 5"	12	9.5	5.5	3
0.156	35'	10"	10" - 5"	9.5	7.5	4	2
<b>30' @ POLE TOP</b>							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	30'	10"	10" - 5"	22	18	11.5	8
0.188	30'	10"	10" - 5"	16	12.5	8	5
0.156	30'	10"	10" - 5"	12.5	10	6	3.5
<b>25' @ POLE TOP</b>							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	25'	10"	10" - 5"	30.5	25	17	12
0.188	25'	10"	10" - 5"	22.5	18	12	8
0.156	25'	10"	10" - 5"	18	14.5	9.5	6.5


- STANDARD POLE SUPPLIED WITH-**
- GROUND BAR & LUG
  - NUT COVERS
- OPTIONS (AS AVAILABLE)**
- POWDERCOAT
  - ANCHOR BOLTS
  - 2 PC CAST BASE COVERS
  - TENONS OR FIXTURE DRILLINGS
  - TOP CAP
  - ELECTRICAL OUTLETS
  - BANNER ARMS
  - BREAKAWAY TRANSFORMER BASES
  - BREAKAWAY CONNECTORS
  - CUSTOM COLORS
  - TAMPER RESISTANT HDWRE
  - VIBRATION DAMPERS (IF REQUIRED)

THE ABOVE POLES ARE ONLY EXAMPLES OF OUR AVAILABLE LINE OF POLES. PLEASE CALL OUR ORDER DESK TO INQUIRE ABOUT YOUR REQUIREMENTS

## 2 PC. CAST BASE COVERS

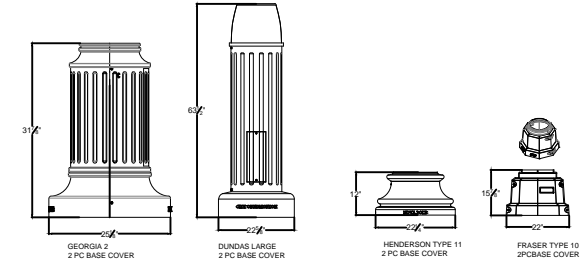


## STRUCTURAL BASE COVERS





ASK OUR SALES DESK ABOUT OTHER AVAILABLE OPTIONS

## ANCHOR BOLTS



POLES ARE FABRICATED FROM 6063-T4 SEAMLESS ALUMINUM AND HEAT TREATED TO T6 AFTER WELDING...  
 WELDING CSA CERTIFIED TO CWB 47.1, 47.2

## DIRECT BURIALS



**NOVA POLE Industries Inc.**  
 64 MA-TE-WAY PARK DRIVE  
 Renfrew, On. Canada  
 K7V 2L5

Tel: 613-431-7653  
 Fax: 613-431-7655  
 www.novapole.com

THIS DRAWING IS THE PROPERTY OF NOVA POLE INDUSTRIES INC. AND CONTAINS CONFIDENTIAL INFORMATION. REPRODUCTION OF THIS DRAWING IN FULL OR PART OR DISCLOSURE OF ANY INFORMATION FROM IT WITHOUT EXPRESS WRITTEN PERMISSION OF NOVA POLE INDUSTRIES INC. IS NOT PERMITTED.