8" ROUND TAPERED ALUMINUM POLE

NPT80 SERIES FREE STANDING 8"Ø ALUMINUM POLES
MAXIMUM HEIGHT 40 FT.
4" X 8" HAND HOLE C/W GROUND LUG
FINISH: ROTARY POLISH OR POWDERCOATED

ORDERING EXAMPLE: NPT8050C25AB
NPT-ROUND TAPERED SERIES
8**0**-DIAMETER AT BASE IS 8 INCHES
50-DIAMETER AT TOP IS 5 INCHES
C - WALL THICKNESS IS .188
25 -POLE IS 25 FEET HIGH
AB-CAST ALUMINUM BASE (DB - DIRECT BURIAL)

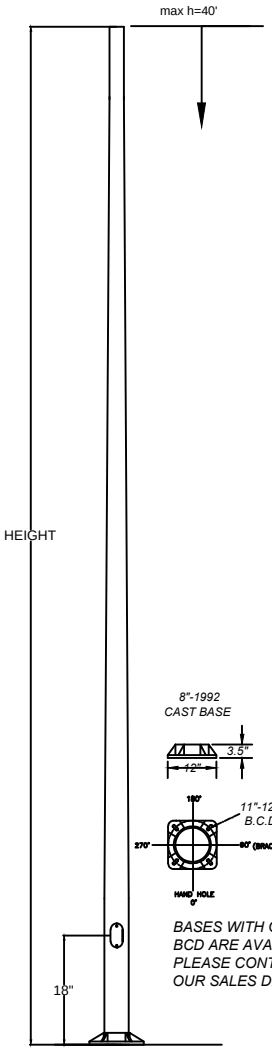

BASE MOUNTED



ANCHOR BOLTS
PROJECTION

NPT 80 SERIES POLES

EPA (MPH) recommend to not exceed

40' @ POLE TOP				100	110	130	150
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	40'	8"	8" - 5"	6.5	5	3	1.5
0.188	40'	8"	8" - 5"	4	3	1.5	N/A
35' @ POLE TOP							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	35'	8"	8" - 5"	9	7.5	5	2.5
0.188	35'	8"	8" - 5"	6	4	3	1.5
30' @ POLE TOP							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	30'	8"	8" - 5"	12.5	10	6.5	4.5
0.188	30'	8"	8" - 5"	8.5	6.5	4.5	2.5
25' @ POLE TOP							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	25'	8"	8" - 5"	18	14.5	10	7
0.188	25'	8"	8" - 5"	13	10	7	4.5
20' @ POLE TOP							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	20'	8"	8" - 5"	24	19.5	13.5	9.5
0.188	20'	8"	8" - 5"	17.5	14.5	10	7
15' @ POLE TOP							
WALL	LENGTH	BUTT DIAM	TOP DIAM.				
0.25	15'	8"	8" - 5"	33.5	27.5	19.5	14.5
0.188	15'	8"	8" - 5"	25	20.5	14.5	10.5

THE ABOVE POLES ARE ONLY EXAMPLES OF OUR AVAILABLE LINE OF POLES. PLEASE CALL OUR ORDER DESK TO INQUIRE ABOUT YOUR REQUIREMENTS

STANDARD POLE SUPPLIED WITH-

: GROUND BAR & LUG
: NUT COVERS

OPTIONS (AS AVAILABLE)
- POWDERCOAT
- ANCHOR BOLTS
-2 PC CAST BASE COVERS
- TENONS OR FIXTURE DRILLINGS
- TOP CAP
- ELECTRICAL OUTLETS
- BANNER ARMS
- BREAKAWAY TRANSFORMER BASES
- BREAKAWAY CONNECTORS
- CUSTOM COLORS
- TAMPER RESISTANT HDWRE
- VIBRATION DAMPERS (IF REQUIRED)



BASES WITH OTHER BCD ARE AVAILABLE PLEASE CONTACT OUR SALES DESK

2 PC. CAST BASE COVERS



TALLAHASSEE
2PC BASE COVER



GIVERNY
2 PC. BASE COVER



HENDERSON TYPE 8
2 PC BASE COVER



ALDER TYPE 8
2 PC BASE COVER



FRASER TYPE 8
2PCBASE COVER

STRUCTURAL BASE COVERS



GLENORA
2 PC BASE COVER



9160
OKANAGAN
2 PCBASE COVER

ASK OUR SALES DESK ABOUT OTHER AVAILABLE OPTIONS

ANCHOR BOLTS



COMES WITH 2 NUTS & 2 WASHERS

DIRECT BURIALS



BELOW GRADE SECTION OVALIZED , POWDERCOATED, AND RUBBER PIPE WRAPPED

POLES ARE FABRICATED FROM 6063-T4 SEAMLESS ALUMINUM AND HEAT TREATED TO T6 AFTER WELDING...

WELDING CSA CERTIFIED TO CWB 47.1, 47.2

NOVA POLE Industries Inc.
64 MA-TE-WAY PARK DRIVE
Renfrew, On. Canada
K7V 2L5

Tel: 613-431-7653
Fax: 613-431-7655
www.novapole.com

THIS DRAWING IS THE PROPERTY OF NOVA POLE INDUSTRIES INC. AND CONTAINS CONFIDENTIAL INFORMATION. REPRODUCTION OF THIS DRAWING IN FULL OR PART OR DISCLOSURE OF ANY INFORMATION FROM IT WITHOUT EXPRESS WRITTEN PERMISSION OF NOVA POLE INDUSTRIES INC. IS NOT PERMITTED.