


ROUND STRAIGHT ALUMINUM POLES


NP SERIES FREE STANDING ROUND ALUMINUM POLES
 MAXIMUM HEIGHT 40 FT.
 HAND HOLE C/W GROUND LUG
 FINISH: ROTARY POLISH OR POWDERCOATED

ORDERING EXAMPLE: NP70C22AB
 NP-ROUND STRAIGHT SERIES
 70-DIAMETER AT BASE IS 7 INCHES
 DIAMETER AT TOP IS 7 INCHES
 C - WALL THICKNESS IS .188
 22 - POLE IS 22 FEET HIGH
 AB-CAST ALUMINUM BASE (DB - DIRECT BURIAL)

MOUNTING HEIGHT 20 TO 40 FEET

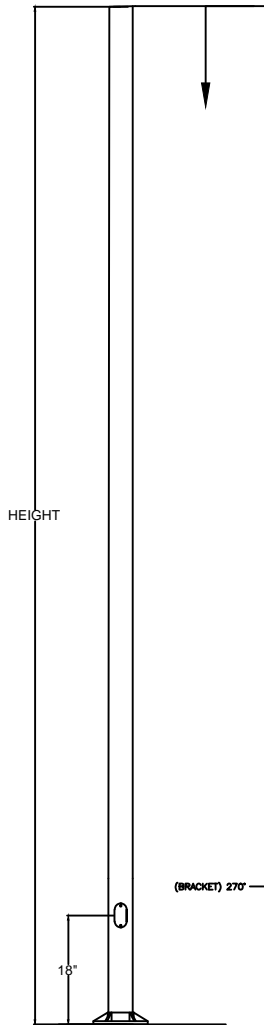


BASE MOUNTED



ANCHOR BOLTS PROJECTION

DIRECT BURIALS



BELOW GRADE SECTION OVALIZED, POWDERCOATED, AND RUBBER PIPE WRAPPED


NP ROUND STRAIGHT ALUMINUM POLES

MODEL	WALL	LENGTH	BUTT DIAM	TOP DIAM.	EPA (MPH) recommend to not exceed			
					100	115	130	150
NP40C15AB	0.188	15'	4"	4"	2	1.75	1	N/A
NP40D15AB	0.25	15'	4"	4"	3.5	2.5	1.75	1.25
20' @ POLE TOP								
	WALL	LENGTH	BUTT DIAM	TOP DIAM.				
NP50C20AB	0.188	20'	5"	5"	4	3	2.5	N/A
NP60C20AB	0.188	20'	6"	6"	8	6	4.5	3.5
NP70C20AB	0.188	20'	7"	7"	12	9	7	6
25' @ POLE TOP								
	WALL	LENGTH	BUTT DIAM	TOP DIAM.				
NP60C25AB	0.188	25'	6"	6"	5	3.5	2.5	2
NP70C25AB	0.188	25'	7"	7"	8	6	5	4
NP80C25AB	0.188	25'	8"	8"	12	9	7	5.5
30' @ POLE TOP								
	WALL	LENGTH	BUTT DIAM	TOP DIAM.				
NP80C30AB	0.188	30'	8"	8"	8	6	4.5	3
NP80D30AB	0.25	30'	8"	8"	11.5	9	7	5
35' @ POLE TOP								
	WALL	LENGTH	BUTT DIAM	TOP DIAM.				
NP80D35AB	0.25	35'	8"	8"	9	6.5	5	3.5
NP10D35AB	0.25	35'	10"	10"	11.5	8	6	4
40' @ POLE TOP								
	WALL	LENGTH	BUTT DIAM	TOP DIAM.				
NP10C40AB	0.188	40'	10"	10"	9	6	4	5.5
NP10D40AB	0.25	40'	10"	10"	13.5	9	6.5	4.5

THE ABOVE POLES ARE ONLY EXAMPLES OF OUR AVAILABLE LINE OF POLES. PLEASE CALL OUR ORDER DESK TO INQUIRE ABOUT YOUR REQUIREMENTS

2 PC. CAST BASE COVERS (ASK OUR SALES DESK)

PLEASE CONTACT OUR SALES DESK FOR INFORMATION ON OUR FULL LINE OF TWO PC. AND STRUCTURAL BASES

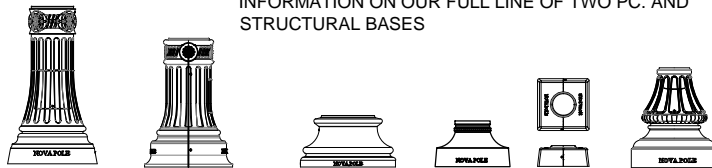


STANDARD POLE SUPPLIED WITH-

- : GROUND BAR & LUG
- : NUT COVERS

OPTIONS (AS AVAILABLE)


- POWDERCOAT
- ANCHOR BOLTS
- 2 PC CAST BASE COVERS
- TENONS OR FIXTURE DRILLINGS
- TOP CAP
- ELECTRICAL OUTLETS
- BANNER ARMS
- BREAKAWAY TRANSFORMER BASES
- BREAKAWAY CONNECTORS
- CUSTOM COLORS
- TAMPER RESISTANT HDWRE
- VIBRATION DAMPERS (IF REQUIRED)

ANCHOR BOLTS



POLES ARE FABRICATED FROM 6063-T4 SEAMLESS ALUMINUM AND HEAT TREATED TO T6 AFTER WELDING...

WELDING CSA CERTIFIED TO CWB 47.1, 47.2



NOVA POLE Industries Inc.
 64 MA-TE-WAY PARK DRIVE
 Renfrew, On. Canada
 K7V 2L5

Tel: 613-431-7653
 Fax: 613-431-7655
 www.novapole.com

THIS DRAWING IS THE PROPERTY OF NOVA POLE INDUSTRIES INC. AND CONTAINS CONFIDENTIAL INFORMATION. REPRODUCTION OF THIS DRAWING IN FULL OR PART OR DISCLOSURE OF ANY INFORMATION FROM IT WITHOUT EXPRESS WRITTEN PERMISSION OF NOVA POLE INDUSTRIES INC. IS NOT PERMITTED.